

ENGLISH



DESCRIPTION

The EXPERT LED ceiling light is the best solution for your cold room's lighting. It saves energy by using LED technology; furthermore the modern and thin design ensures the minimum space requirements.

APPLICATIONS

- Lighting of cold rooms at negative temperatures.
- Lighting of cold rooms at positive temperatures.

PRINCIPAL CHARACTERISTICS


- Instant start, without waiting time, even at low temperatures.
- Energy saving compared with fluorescent solutions.
- Reduced maintenance costs due to the LED's long life.
- Easy installation.
- Thin design.
- IP 65 protection rating.
- High brightness.
- Supply circuit designed to minimize the heat generated by the light.

MODELS

PEGO CODE	DESCRIPTION
200LED30	700 lumen, 8 W, length 419 mm.
200LED60	1570 lumen, 16,5 W, length 665 mm.
200LED120	3250 lumen, 33,5 W, length 1157 mm.

TECHNICAL DATA

Power voltage	
Power voltage	230V~ ±10% 50/60Hz
Absorbed power	200LED30: 8 W
	200LED60: 16,5 W
	200LED120: 33,5 W
Driver	Integrated
Environment conditions	
Operating temperature	-30 ÷ 40°C - humidity < 90% Rel. Hum. Not condensing
Storage temperature	-35 ÷ 70°C - humidity < 90% Rel. Hum. Not condensing
Unsuitable operating environments	Environments with strong vibrations or impacts; aggressive, polluted or corrosive atmospheres, exposure to direct solar radiation, explosive atmospheres or flammable gas.
General characteristics	
Lamp	LED, integrated, non-replaceable
Luminous flux	200LED60: 700 lumen
	200LED60: 1570 lumen
	200LED120: 3250 lumen
Color temperature	5700 K
Color Rendering Index	> 80
Connection	Pre-wired cable (100 cm)
Installation	Single; ceiling mounting with screws
Turn-on time	< 0,2s
Warm-up time (60%)	Instant on
Number of on-off cycles	100.000
Dimensional, insulation and mechanical characteristics	
Dimensions	200LED30: 419x93x36mm
	200LED60: 665x93x36mm
	200LED120: 1157x93x36mm
Weight	200LED30: 0.35 Kg
	200LED60: 0.65 Kg
	200LED120: 1.30 Kg
Protection rating	IP65
Casing	Self-extinguishing V0 polycarbonate
Insulation type	Class II
Conformity with EEC low voltage directives, electromagnetic compatibility and EC mark	
EN 60598-1:2008 + A11:2009; EN 60598-2-1:1989; EN 62493:2010; EN 62471:2008; EN 62031:2008 + A1:2013 + A2:2015; EN 55015; EN 61547.	

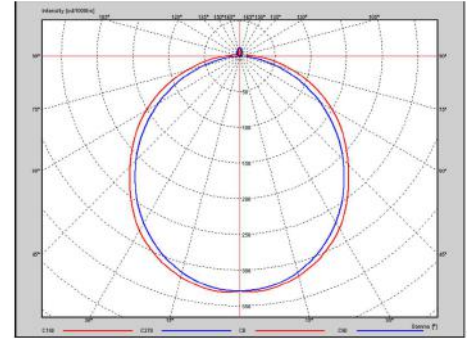

GENERAL INFORMATION

PEGO S.r.l. does not accept responsibility for any loss of data or information, costs of goods or substitute services, damages to objects, persons or animals, lost sales or profits, interruption of activities, any direct, indirect, accidental, property, insured, punitive, special or consequential damage caused in any way, be it contractual, extra-contractual or due to negligence or other responsibility resulting from the use of the product or its installation. The guarantee automatically becomes invalid in the case of poor functioning due to tampering, impact or inadequate installation. It is mandatory to observe all instructions in this manual and the operating conditions of the device. PEGO S.r.l. does not accept responsibility for any inaccuracies which may be present in this manual in the case that these are due to printing or transcription errors and reserves the right to make modifications to its products which it deems necessary or appropriate, without prejudicing the products essential characteristics.

ELECTRICAL PRESCRIPTIONS

All conductors used in the cabling must be appropriately sized in order to support the load which they must provide.

FIXING PRESCRIPTIONS

Screws not supplied. Use proper fasteners according to the type of wall.

MAINTENANCE

The LEDs are installed permanently and can't be replaced. Do not use harsh detergents, chemicals or abrasives as they may damage the plastic.

