

SPLS KIT (HFC) – Detectors for synthetic refrigerants

NEW!

KIT including one channel SPLS with corresponding HFC detector

General

This kit is a superior system to detect HFC and alert both locally and remote, intended for installation in engine rooms, cold rooms or other spaces where gas is used, handled or stored. As both sound and light is built in valuable time on site will be saved.

- Test terminal for service tools
- Robust non corrosive PC enclosure for installation also in aggressive environments

Features





- **Monitoring** unit is microprocessor controlled and displays the current operating status via LED's
- **High intense LED alarm flash, (B-alarm)**
- **Built in alarm buzzer, (A-alarm)**
- **Mute function with timer (60min)**
- Three adjustable levels with relay output (230V 5A)
- Alarm delay, selectable in four steps
- Manual or automatic reset on alarm
- Digital input to manually activate all levels and relays
- Fail-safe function with built-in monitoring and power failure alarm
- Built-in self-test and service function

- **Sensor** is power supplied from SPLS unit
- Long-term stable > 5 year life time
- Sensor is consider to be consumable item
- Method for calibration: DT300
- Easy replaceable sensor, see spare parts
- Maintenance: at least once a year

Measuring ranges and alarm levels

Alarm levels are always set on the monitoring unit! Appropriate ranges and alarm levels depends on the environment in which the detectors is installed, the threshold can easily be changed on site.


- Complies with the F-gas REGULATION (EU) No 517/2014 and EN378:2008

Order code	Model	Details	PG	EURO
	SPLS-24	Power supply 12-24V AC/DC Ambient temperature: -40°C..+50°C Humidity: 0..95% Rh (non condensing) IP54		
	MP-DS	Splash proof, room mounting Ambient temperature: -40°C..+50°C Humidity: 0..95% Rh (non condensing) IP54		
21-3620	SPLS24-HFC-KIT	0-4000 ppm, max 3 W	A	
	SPLS-230	Power supply 85 - 230V AC/DC Ambient temperature: -40°C..+50°C Humidity: 0..95% Rh (non condensing) IP54		
	MP-DS	Splash proof, room mounting Ambient temperature: -40°C..+50°C Humidity: 0..95% Rh (non condensing) IP54		
21-3625	SPLS230-HFC-KIT	0-4000 ppm, max 3 W	A	

Alarm levels are always set on the monitoring unit, which is normally done during commissioning of the system.

Factory-set alarm levels (by experience appropriate alarm levels and ranges):

Detector type	Range	Alarm levels
HFC	0-4,000ppm	100 / 1000 / 2000 ppm

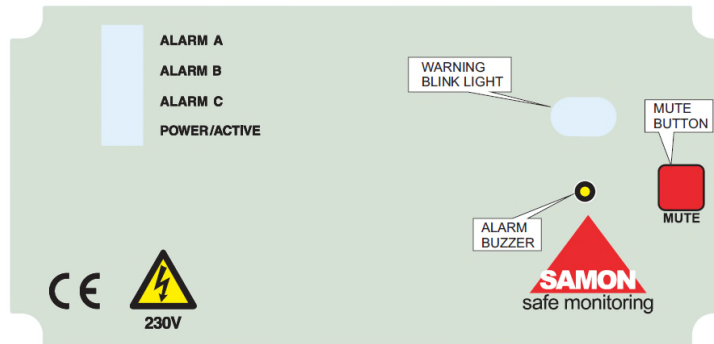

WARNING IS ACTIVATED ON B-LEVEL
ALARM IS ACTIVATED ON A-LEVEL

